

# Hydraulic Adapter Kit


The connection between application and filtration system

### Features

- Replaceable breather with color-indicating desiccant
- Quick connect plugs
- Single-position vacuum indicator
- Sample port
- 6-hole flange connection size

### Benefits

- Prohibits entry of dirt and moisture
- Allows for easy equipment adaptation and quick connection to a filtration system
- Customizable

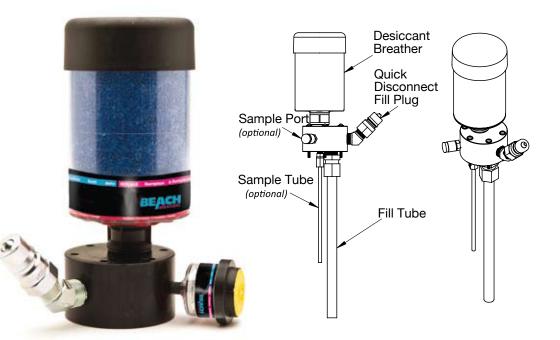

Beach hydraulic adapter kits incorporate quick connect fittings, desiccant breather filters, vacuum indicators, and sample ports to function as the connection between your application and filtration system. Pairing fluid handling filtration with breather protection allows for maximum system integrity–requiring less equipment and labor while reducing system contamination.

Customize your adapter kit at beachfilters.com/fluidguard

When clean dry air is a must, Beach is the clear choice.

### 7682 Glenville Rd., Glen Rock, PA 17327 Phone (717) 235-1136 • Fax (717) 235-4858 (800) 232-2485 www.beachfilters.com





Select the desired symbol (in the correct position) to construct a model code. Then call your local distributor of Beach if you don't see the options you need or would like additional assistance.

#### FILL CONNECTOR TYPE / DDECOUDE CIDE \* [David]

PRESSURE SIDE [BOX 4]				
Code	Description			
F	Flush Face Connector			
A	ISO A Connector			
В	ISO B Connector			

**FILL CONNECTOR** SIZE [Box 5]

SIZE [BOX 5]			
Code	Description		
3	1/2 inch		
5	3/4 inch		
7	1 inch		

\* All are plug ends (male)

#### FILL TUBE LENGTH [Box 6]

DRAIN CONNECTOR TYPE/

Description

Flush Face Connector

ISO A Connector

ISO B Connector

SUCTION SIDE\* [Box 2]

Code

F

А

В

Code	Description
*12	12 inches
18	18 inches
24	24 inches
30	30 inches

Code	Description	
02	3-micron particulate desiccant breather; 0-60 gallons; 120 gpm	[BB-2]
03*	3-micron particulate desiccant breather; 61-100 gallons; 120 gpm	[BB-3]
04	3-micron particulate desiccant breather; 101-200 gallons; 120 gpm	[BB-4]
ND35	0.3-micron oil coalescing pleated particulate breather for oil-mist applications; non-desiccant; 300 gpm	[BB-ND-35]
XD	0.3-micron particulate desiccant breather for harsh environments; 0-200 gallons; 120 gpm	[BB-XD-6]

#### CUSTOM COLORS [Box 10]

Code	Description		
1	Brushed Aluminum		
2	Black*		
3	White		
4	Blue		
5	Red		
6	Yellow		

\* Black is standard

REORDER NOTE: For breather replacement, use bracketed number.

\* Standard for hydraulic adapters

Considerations such as humidity level, frequency and maximum amount of air flow, ambient temperatures, gallons of lubricant and chemical compatibility are very important in sizing a desiccant breather properly. Call Beach for assistance in sizing the appropriate breather for your application.

## Try All Beach Adapter Kits



Hydraulic Adapter



Gearbox Adapter

#### 7 7 1 inch \* All are plug ends (male) SAMPLE PORT [Box 7] SAMPLE TUBE LENGTH [Box 8] Descrip Code otion

Description	Code		Description
None			Enter 2 digits (e.g. 08 for 8 inches)
Standard Minimess			ranging from 06-60"

\*Enter 00 for no sample port

30	30 inches			
* Recom	mended length of 12"			
BREA	THER FILTER [Box 9]			
Code	Description			
02	3-micron particulate desiccant breather	[BB-2]		
03*	3-micron particulate desiccant breather; 61-100 gallons; 120 gpm			
04	3-micron particulate desiccant breather	; 101-200 gallons; 120 gpm	[BB-4]	
ND35	0.3-micron oil coalescing pleated partic non-desiccant; 300 gpm	ulate breather for oil-mist applications;	[BB-ND-35]	

DRAIN CONNECTOR

Description

1/2 inch

3/4 inch

0

1

SIZE [Box 3]

Code

3

5

When clean dry air is a must, Beach is the clear choice.